




Your PDF Guides

You can read the recommendations in the user guide, the technical guide or the installation guide for ROLAND TD-4KX. You'll find the answers to all your questions on the ROLAND TD-4KX in the user manual (information, specifications, safety advice, size, accessories, etc.). Detailed instructions for use are in the User's Guide.

User manual ROLAND TD-4KX
User guide ROLAND TD-4KX
Operating instructions ROLAND TD-4KX
Instructions for use ROLAND TD-4KX
Instruction manual ROLAND TD-4KX

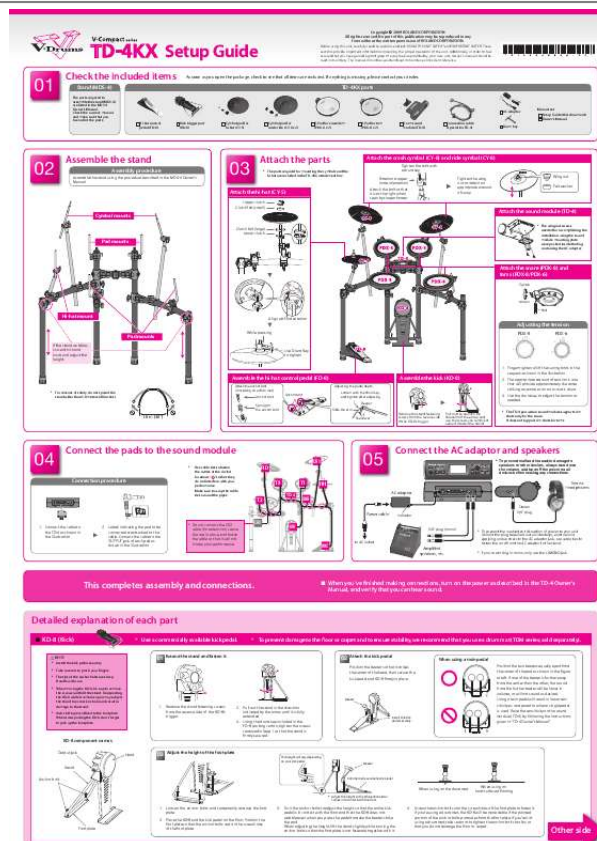

[You're reading an excerpt. Click here to read official ROLAND TD-4KX user guide](http://yourpdfguides.com/dref/3352640)
<http://yourpdfguides.com/dref/3352640>

Manual abstract:

No part of this publication may be reproduced in any form without the written permission of ROLAND CORPORATION. Before using this unit, carefully read the sections entitled: "USING THE UNIT SAFELY" and "IMPORTANT NOTES." These sections provide important information concerning the proper operation of the unit. Additionally, in order to feel assured that you have gained a good grasp of every feature provided by your new unit, Owner's manual should be read in its entirety. The manual should be saved and kept on hand as a convenient reference. 01 Check the included items Stand (MDS-4) The parts required to assemble the stand (MDS-4) are listed in the MDS-4 Owner's Manual. Check the owner's manual and make sure that you have all of the parts. As soon as you open the package, check to see that all items are included. If anything is missing, please contact your dealer. TD-4KX parts AC adaptor Hi-hat control pedal (FD-8) Kick trigger pad (KD-8) Cymbal pad for hi-hat (CY-5) Cymbal pad for crash/ride (CY-8 x 2) V-Pad for snare/tom (PDX-8 x 2) V-Pad for tom (PDX-6 x 2) Drum sound module (TD-4) Connection cable (special for TD-4) Manual set Setup Guide (this document) Owner's Manual Drum key 02 Assemble the stand Assembly procedure Assemble the stand using the procedure described in the MDS-4 Owner's Manual.

03 Attach the parts Attach the crash cymbal (CY-8) and ride cymbal (CY-8) Tighten the bolt with a drum key. Rotation stopper (note orientation) Attach the bolt so that it is at the right when seen by the performer. Tighten the wing nut to obtain an appropriate amount of sway. Wing nut Felt washer Upper clutch * The parts required for mounting the cymbals and the Upper clutch Clutch felt (small) hi-hat are included in the TD-4KX attachment box. Clutch felt (small) Attach the hi-hat (CY-5) Clutch felt (large) Upper clutch Clutch feltclutch Lower (large) Clutch feltclutch Lower (small) Cymbal mounts Clutch felt (large) Lower clutch Attach the sound module (TD-4) * The wingnut screws needed for accomplishing the installation using the sound module mounting plate were packed inside the bag containing the AC adaptor.

Pad mounts Attach the snare (PDX-8) and toms (PDX-8/PDX-6) Tighten Loosen Rod Hi-hat mount Align with indentation Align with indentation While pressing While pressing Align with indentation Use Drum Key Use Drum to tighten Key to tighten While pressing 4 Adjusting the tension PDX-8 6 1 3 2 2 5 5 3 Pad mounts If the stand wobbles, loosen this hand knob and adjust the height. PDX-6 4 1 Assemble the hi-hat control pedal (FD-8) Use Drum Key * For reasons of safety, do not spread the stand wider than 1.0 meters (40 inches). Attach the anchor bolt (if installing on a drum mat) Anchor bolt Spring for the anchor bolt Assemble the kick (KD-8) Adjusting the pedal depth Loosen with the drum key, and tighten after adjusting Deeper Slide the arm Shallower Remove the stand fastening screws from the reverse side of the KD-8's trigger. @@@@2.

@@@3. Use the drum key to adjust the tension as needed. * The TD-4 percussion sound module supports rim shots only for the snare. It does not support rim shots for toms. to tighten Anchor bolt 1.0 m (40") 04 Connect the pads to the sound module CR1 * Use cable ties to fasten the cables at the circled locations " so that they do not interfere with your performance. Make sure to wrap the cable ties around the pipes. RD T2 T3 TD-4 05 Power cable Connect the AC adaptor and speakers * To prevent malfunction and/or damage to speakers or other devices, always turn down the volume, and turn off the power on all devices before making any connections. Connection procedure T1 SNR HH AC adaptor Stereo 1/4" plug Stereo Headphones Indicator 1. Connect the cable to the TD-4 as shown in the illustration.

2. Labels indicating the pad to be connected are attached to the cable. Connect the cable to the OUTPUT jack of each pad as shown in the illustration. * Do not connect the CR2 cable (for extension). Leave the cap in place, and fasten the cable so that it will not hinder your performance. CR2 KIK HHC to AC outlet 1/4" plug (mono) * To prevent the inadvertent disruption of power to your unit (should the plug be pulled out accidentally), and to avoid applying undue stress to the AC adaptor jack, use cable ties to fasten the cord from the AC adaptor to the stand. * If you're working in mono, only use the L/MONO jack. Amplified speakers, etc. This completes assembly and connections. When you've finished making connections, turn on the power as described in the TD-4 Owner's Manual, and verify that you can hear sound.

Detailed explanation of each part KD-8 (Kick) NOTE * Install the kick pedal securely. * Take care not to pinch your fingers. * The tips of the anchor bolts are sharp. Handle with care. * When moving the KD-8, be sure to remove the screws and fold the stand.

Transporting the KD-8 while it remains open may subject the stand to excessive strain and result in damage to the stand. * Anti-skid tape is affixed to the foot plate. When transporting the KD-8, don't forget to pick up the foot plate. * Use a commercially available kick pedal. 01 Extend the stand and fasten it * To prevent damage to the floor or carpet and to ensure stability, we recommend that you use a drum mat (TDM series; sold separately).

02 Attach the kick pedal Position the beater so that it strikes the center of the head, then secure the kick pedal and KD-8 firmly in place. When using a twin pedal Position the two beaters equally apart from the center of the pad as shown in the figure at left. If one of the beater is further away from the center than the other, the sound from the further beater will be lower in volume, or will not sound as desired. Using a twin pedal will result in lower sensitivity as compared to when a single pedal is used. Raise the sensitivity on the sound module (TD-4) by following the instructions given in "TD-4 Owner's Manual." Beater 1. Remove the stand fastening screws from the reverse side of the KD-8's trigger. 2. @@@@2. @@@Place the KD-8 and the kick pedal on the floor.

@@@@@@@Handle with care. @@@@@@@@@@@@@@Doing so can interfere with accurate detection, and may damage it. @@Replace the head when the following occurs: Slack portions remain in the head even when the head tension is properly adjusted. * To obtain replacement heads, please contact the nearest Roland Service Center or an authorized Roland distributor, as listed in "Information." Loosen Tighten Drum key 1. Remove all tuning bolts and washers. @@@@3. 4. 5. 6.

7. Head sensor Rim sensor Remove the hoop. Remove the old head. Place the new head on the shell. Place the hoop on the head. Attach the tuning bolts to the hoop and shell. Adjust the head tension.



[You're reading an excerpt. Click here to read official ROLAND](#)

[TD-4KX user guide](#)

<http://yourpdfguides.com/dref/3352640>

.....
.....
.....
.....
.....

... For EU Countries · When using the unit with a stand (MDS series) recommended by Roland, the stand (MDS series) must be carefully placed so it is level and sure to remain stable. If not using a stand (MDS series), you still need to make sure that any location you choose for placing the unit provides a level surface that will properly support the unit, and keep it from wobbling. 011

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

.... · Do not allow any objects (e.g., flammable material, coins, pins); or liquids of any kind (water, soft drinks, etc.) to penetrate the unit. ..

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

..... · In households with small children, an adult should provide supervision until the child is capable of following all the rules essential for the safe operation of the unit. · Do not drop the unit. 014 013 .

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

