




Your PDF Guides

You can read the recommendations in the user guide, the technical guide or the installation guide for HUSQVARNA 122C. You'll find the answers to all your questions on the HUSQVARNA 122C in the user manual (information, specifications, safety advice, size, accessories, etc.). Detailed instructions for use are in the User's Guide.

User manual HUSQVARNA 122C
User guide HUSQVARNA 122C
Operating instructions HUSQVARNA 122C
Instructions for use HUSQVARNA 122C
Instruction manual HUSQVARNA 122C

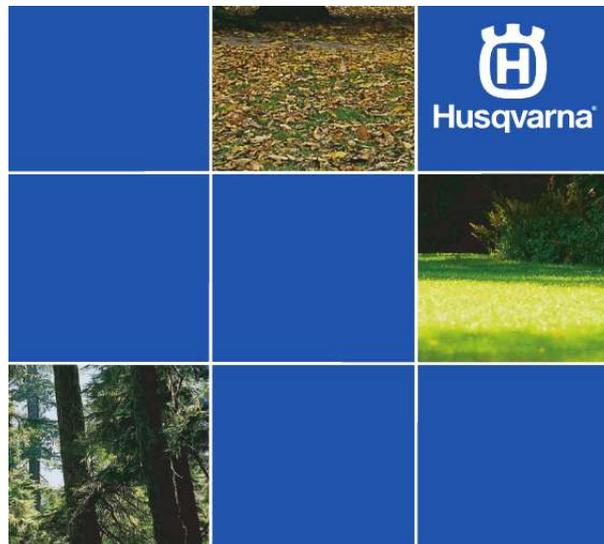

Operator's manual
Manuel d'utilisation
Manual de instrucciones

122C 122LD_x-series



Please read the operator's manual carefully and make sure you understand the instructions before using the machine.
Lire attentivement et bien assimiler le manuel d'utilisation avant d'utiliser la machine.
Leer detenidamente el manual de instrucciones y asegurarse de entender su contenido antes de utilizar la máquina.

English (2-24)
French (25-48)
Spanish (49-72)



[You're reading an excerpt. Click here to read official HUSQVARNA 122C user guide](#)

<http://yourpdfguides.com/dref/4739420>

Manual abstract:

Always wear: A protective helmet where there is a risk of falling objects • • Approved hearing protection Approved eye protection Visual check. max. Speed of output shaft, rpm Other symbols/decals on the machine refer to special certification requirements for certain markets. The engine is switched off by moving the stop switch to the stop position. cAUTION! The stop switch automatically returns to the start position. @@The operator of the machine must ensure, while working, that no persons or animals come closer than 15 metres. 2 – English CONTENTS Contents KEY TO SYMBOLS Symbols on the machine and/or in the manual: . cONTENTS Contents . Note the following before starting: . What is what on the grass trimmer? Fitting the trimmer guard and trimmer head .

FEDERAL AND CALIFORNIA EMISSIONS CONTROL WARRANTY STATEMENT YOUR WARRANTY RIGHTS AND OBLIGATIONS 2 3 3 4 5 6 6 7 9 10 10 10 12 12 13 14 14 15 17 17 18 18 18 19 20 21 The Emissions Compliance Period referred to on the Emission Compliance label indicates the number of operating hours for which the engine has been shown to meet Federal and Californian emissions requirements. Note the following before starting: Please read the operator's manual carefully. Maintenance, replacement, or repair of the emission control devices and system may be performed by any nonroad engine repair establishment or individual. Long-term exposure to noise can result in permanent hearing impairment. So always use approved hearing protection.

wARNING! Under no circumstances may the design of the machine be modified without the permission of the manufacturer. always use genuine accessories. Non-authorized modifications and/or accessories can result in serious personal injury or the death of the operator or others. Your warranty may not cover damage or liability caused by the use of nonauthorized accessories or replacement parts. wARNING! A clearing saw, brushcutter or trimmer can be dangerous if used incorrectly or carelessly, and can cause serious or fatal injury to the operator or others.

It is extremely important that you read and understand the contents of this operator's manual. ! 23 The engine exhaust from this product contains chemical known to the State of California to cause cancer, birth defects or other reproductive harm. english – 3 INTRODUCTION Dear customer! Congratulations on your choice to buy a Husqvarna product! Husqvarna is based on a tradition that dates back to 1689, when the Swedish King Karl XI ordered the construction of a factory on the banks of the Huskvarna River, for production of muskets. The location was logical, since water power was harnessed from the Huskvarna River to create the waterpowered plant. During over 300 years of continuous operation, the Husqvarna factory has produced a lot of different products, from wood stoves to modern kitchen appliances, sewing machines, bicycles, motorcycles etc. In 1956, the first motor driven lawn mowers appeared, followed by chain saws in 1959, and it is within this area Husqvarna is working today. Today Husqvarna is one of the leading manufacturers in the world of forest and garden products, with quality as our highest priority. We develop, manufacture and market high quality motor driven products for forestry and gardening as well as for building and construction industry. Your purchase gives you access to professional help with repairs and service whenever this may be necessary.

If the retailer who sells your machine is not one of our authorized dealers, ask for the address of your nearest servicing dealer.

It is our wish that you will be satisfied with your product and that it will be your companion for a long time. Think of this operator's manual as a valuable document. By following its' content (using, service, maintenance etc) the life span and the second-hand value of the machine can be extended. If you ever lend or sell this machine, make sure that the borrower or buyer gets the operator's manual, so they will also know how to properly maintain and use it. Thank you for using a Husqvarna product. Husqvarna AB has a policy of continuous product development and therefore reserves the right to modify the design and appearance of products without prior notice. For customer assistance, contact us at our website: www. 18 19 1 122LDx-series 4 2 122C 4 9 3 17 7 13 12 8 16

9 8 2 3 6 9 20 2 1 5 11 10 7 13 12 5 16 11 10 15 What is what on the grass trimmer? 1 2 3 4 5 6 7 8 9 Trimmer head Cutting attachment guard Shaft Loop handle Throttle trigger Stop switch Throttle lockout Spark plug cap and spark plug Starter 11 Air filter cover 12 Air purge. 13 Choke control 14 Operator's manual 15 Combination spanner 16 Starter 17 Shaft coupling 18 Bevel gear 19 Grease filler cap , bevel gear 20 Drive disc 14 10 Fuel tank English – 5 GENERAL SAFETY PRECAUTIONS Important IMPORTANT! The machine is only designed for trimming grass. The only accessories you can operate with this engine unit are the cutting attachments we recommend in the chapter on Technical data.

Never use the machine if you are tired, if you have drunk alcohol, or if you are taking medication that could affect your vision, your judgement or your coordination. wear personal protective equipment. See instructions under the heading "Personal protective equipment". Never use a machine that has been modified in any way from its original specification. Never use a machine that is faulty.

Carry out the checks, maintenance and service instructions described in this manual. Some maintenance and service measures must be carried out by trained and qualified specialists. See instructions under the heading Maintenance. All covers, guards and handles must be fitted before starting. Ensure that the spark plug cap and ignition lead are undamaged to avoid the risk of electric shock.

The machine operator must ensure that no people or animals come closer than 15 metres while working. When several operators are working in the same area the safety distance should be at least twice the tree height and no less than 15 metres. Do an overall inspection of the machine before use, see maintenance schedule. wARNING! This machine produces an electromagnetic field during operation. This field may under some circumstances interfere with active or passive medical implants. To reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their physician and the medical implant manufacturer before operating this machine. wARNING! Running an engine in a confined or badly ventilated area can result in death due to asphyxiation or carbon monoxide poisoning. EYE PROTECTION Always wear approved eye protection. If you use a visor then you must also wear approved protective goggles. Approved protective goggles must comply with standard ANSI Z87.

Never allow children to use or be in the vicinity of the machine. As the machine is equipped with a springloaded stop switch and can be started by low speed and force on the starter handle, even small children under some circumstances can produce the force necessary to start the machine.



[You're reading an excerpt. Click here to read official HUSQVARNA](http://yourpdfguides.com/dref/4739420)

[122C user guide](http://yourpdfguides.com/dref/4739420)

<http://yourpdfguides.com/dref/4739420>

This can mean a risk of serious personal injury. Therefore remove the spark plug cap when the machine is not under close supervision. personal protective equipment **IMPORTANT!** A clearing saw, brushcutter or trimmer can be dangerous if used incorrectly or carelessly, and can cause serious or fatal injury to the operator or others. It is extremely important that you read and understand the contents of this operator's manual. You must use approved personal protective equipment whenever you use the machine. Personal protective equipment cannot eliminate the risk of injury but it will reduce the degree of injury if an accident does happen. Ask your dealer for help in choosing the right equipment. **wARNING!** Listen out for warning signals or shouts when you are wearing hearing protection.

Always remove your hearing protection as soon as the engine stops. A protective helmet where there is a risk of falling objects **HEARING PROTECTION** Wear hearing protection that provides adequate noise reduction. ! 6 – English **GENERAL SAFETY PRECAUTIONS GLOVES** Gloves should be worn when necessary, e. Never use a machine with faulty safety equipment. The machine's safety equipment must be checked and maintained as described in this section.

If your machine fails any of these checks contact your service agent to get it repaired. throttle lockout **BOOTS** Wear sturdy, non-slip boots. The throttle lockout is designed to prevent accidental operation of the throttle control. When you press the lock (A) (i. e.

When you grasp the handle) it releases the throttle control (B). When you release the handle the throttle control and the throttle lockout both move back to their original positions. This movement is controlled by two independent return springs. This arrangement means that the throttle control is automatically locked at the idle setting. **CLOTHING** Wear clothes made of a strong fabric and avoid loose clothing that can catch on twigs and branches. Always wear heavy, long pants. do not wear jewellery, shorts sandals or go barefoot. Secure hair so it is above shoulder level. **FIRST AID KIT** Always have a first aid kit nearby. Make sure the throttle control is locked at the idle setting when the throttle lockout is released.

Machine's safety equipment This section describes the machine's safety equipment, its purpose, and how checks and maintenance should be carried out to ensure that it operates correctly. see the "What is what? □ section to locate where this equipment is positioned on your machine. The life span of the machine can be reduced and the risk of accidents can increase if machine maintenance is not carried out correctly and if service and/or repairs are not carried out professionally. If you need further information please contact your nearest servicing dealer. **iMPORTANT!** All servicing and repair work on the machine requires special training. This is especially true of the machine's safety equipment. If your machine fails any of the checks described below you must contact your service agent. When you buy any of our products we guarantee the availability of professional repairs and service. If the retailer who sells your machine is not a servicing dealer, ask him for the address of your nearest service agent. Check that the throttle trigger and throttle lockout move freely and that the return springs work properly.

Press the throttle lockout and make sure it returns to its original position when you release it. English – 7 **GENERAL SAFETY PRECAUTIONS** See instructions under the heading Start. start the machine and apply full throttle. Release the throttle and check that the cutting attachment stops and remains at a standstill. If the cutting attachment rotates with the throttle in the idle position then the carburettor idle setting must be checked.

See instructions under the heading Maintenance. Muffler Stop switch Use the stop switch to switch off the engine. The muffler is designed to keep noise levels to a minimum and to direct exhaust fumes away from the user. a muffler fitted with a catalytic converter is also designed to reduce harmful exhaust gases.

Start the engine and make sure the engine stops when you move the stop switch to the stop setting.

Cutting attachment guard This guard is intended to prevent loose objects from being thrown towards the operator. The guard also protects the operator from accidental contact with the cutting attachment. In countries that have a warm and dry climate there is a significant risk of fire. We therefore fit certain mufflers with a spark arrestor screen. Check whether the muffler on your machine is fitted with this kind of screen. Check that the guard is undamaged and not cracked. replace the guard if it has been exposed to impact or is cracked. Always use the recommended guard for the cutting attachment you arWhile securely holding the engine end, pull the attachment straight out of the coupling. C English – 11 **FUEL HANDLING** Fuel safety Never start the machine: 1 2 If you have spilled fuel on it. Wipe off the spillage and allow remaining fuel to evaporate.

If you have spilled fuel on yourself or your clothes, change your clothes. Wash any part of your body that has come in contact with fuel. Check regularly for leaks from the fuel cap and fuel lines. gasoline 3 **CAUTION!** Always use a quality gasoline/oil mixture with an octane rating of at least 87 octane ((RON+MON)/2). If your machine is equipped with a catalytic converter (see chapter on Technical data) always use a good quality unleaded gasoline/oil mixture. leaded gasoline will destroy the catalytic converter. Use low-emission gasoline, also known as alkylate gasoline, if it is available. Transport and storage • Store and transport the machine and fuel so that there is no risk of any leakage or fumes coming into contact with sparks or naked flames, for example, from electrical machinery, electric motors, electrical relays/ switches or boilers. When storing and transporting fuel always use approved containers intended for this purpose. When storing the machine for long periods the fuel tank must be emptied.

Contact your local gas station to find out where to dispose of excess fuel. Ensure the machine is cleaned and that a complete service is carried out before long-term storage. The transport guard must always be fitted to the cutting attachment when the machine is being transported or in storage. Secure the machine during transport. In order to prevent unintentional starting of the engine, the spark plug cap must always be removed during long-term storage, if the machine is not under close supervision and when performing all service measures.

If you run the engine on a lower octane grade than 87 so-called knocking can occur. This gives rise to a high engine temperature and increased bearing load, which can result in serious engine damage. When working at continuous high revs a higher octane rating is recommended. □ • • Two-stroke oil • For best results and performance use HUSQVARNA two-stroke engine oil, which is specially formulated for our air-cooled two stroke-engines.



[You're reading an excerpt. Click here to read official HUSQVARNA 122C user guide](http://yourpdfguides.com/dref/4739420)

<http://yourpdfguides.com/dref/4739420>

Never use two-stroke oil intended for water-cooled engines, sometimes referred to as outboard oil (rated TCW).

Never use oil intended for four-stroke engines. Take care when handling fuel. Bear in mind the risk of fire, explosion and inhaling fumes. •• CAUTION! The machine is equipped with a two-stroke engine and must always be run using a mixture of gasoline and two-stroke engine oil. It is important to accurately measure the amount of oil to be mixed to ensure that the correct mixture is obtained. When mixing small amounts of fuel, even small inaccuracies can drastically affect the ratio of the mixture. Fuel and fuel fumes are highly inflammable and can cause serious injury when inhaled or allowed to come in contact with the skin. For this reason observe caution when handling fuel and make sure there is adequate ventilation. 1 2 1/2 5 12 – English FUEL HANDLING Mixing •• Always mix the gasoline and oil in a clean container intended for fuel. Always start by filling half the amount of the gasoline to be used.

Then add the entire amount of oil. Mix (shake) the fuel mixture thoroughly before filling the machine's fuel tank. Taking the following precautions, will lessen the risk of fire: Mix and pour fuel outdoors, where there are no sparks or flames. Do not smoke or place hot objects near fuel. Always shut off the engine before refuelling. Always stop the engine and let it cool for a few minutes before refuelling. When refuelling, open the fuel cap slowly so that any excess pressure is released gently. Tighten the fuel cap carefully after refuelling. □ •• Do not mix more than one month's supply of fuel at a time. If the machine is not used for some time the fuel tank should be emptied and cleaned.

□ @@ if you have spilled fuel on it. Wipe off the spillage and allow remaining fuel to evaporate. Clean the area around the fuel cap. Contamination in the tank can cause operating problems. Ensure that the fuel is well mixed by shaking the container before filling the tank.

The catalytic converter muffler gets very hot during and after use. This also applies during idling. Be aware of the fire hazard, especially when working near flammable substances and/or vapours. □ • English – 13 STARTING AND STOPPING Check before starting Choke: Set the choke control in the choke position. □ Check that the trimmer head and trimmer guard are not damaged or cracked.

Replace the trimmer head or trimmer guard if they have been exposed to impact or are cracked. ! □ • Never use the machine without a guard nor with a defective guard. @@ WARNING! @@@@ place the machine on a flat surface. @@@@ The safety distance is 15 metres. @@ Not with your foot!). @@@@ when the engine starts. @@ CAUTION! @@ This can damage the machine. Stopping Stop the engine by switching off the ignition. @@ The bulb need not be completely filled. CAUTION! The stop switch automatically returns to the start position.

@@@@@@ Contact your dealer or your service workshop. Avoid all usage which you consider to be beyond your capability. @@ Always hold the machine with both hands. Hold the machine on the right side of your body. Keep all parts of your body away from the hot surfaces. @@@@ To ensure that people, animals, etc. @@ CAUTION! @@ inspect the working area. @@ That could be thrown out or become wrapped around the cutting attachment. Do not use the machine in bad weather, such as dense fog, heavy rain, strong wind, intense cold, etc. Working in bad weather is tiring and often brings added risks, such as icy ground, unpredictable felling direction, etc.

Make sure you can move and stand safely. Check the area around you for possible obstacles (roots, rocks, branches, ditches, etc.) in case you have to move suddenly. Take great care when working on sloping ground. 7 8 9 Keep the cutting attachment below waist level.

The engine must be switched off before moving. Never put the machine down with the engine running unless you have it in clear sight. Neither the operator of the machine nor anyone else may attempt to remove the cut material while the engine is running or the cutting equipment is rotating, as this can result in serious injury. Stop the engine and cutting equipment before you remove material that has wound around the blade shaft as otherwise there is a risk of injury.

The bevel gear can get hot during use and may remain so for a while afterwards.

You could get burnt if you touch it. Always wear approved eye protection. Never lean over the cutting attachment guard. stones , rubbish , etc. Can be thrown up into the eyes causing blindness or serious injury. keep unauthorised persons at a distance. Children, animals, onlookers and helpers should be kept outside the safety zone of 15 m. Stop the machine immediately if anyone approaches. Never swing the machine around without first checking behind you to make sure no one is within the safety zone. 4 ! English – 15 WORKING TECHNIQUES Basic working techniques Always slow the engine to idle speed after each working operation.

Long periods at full throttle without any load on the engine can lead to serious engine damage. clearing • The clearing technique removes all unwanted vegetation. Keep the trimmer head just above the ground and tilt it. Let the end of the cord strike the ground around trees, posts, statues and the like. CAUTION! This technique increases the wear on the cord. Sometimes branches or grass get caught between the guard and cutting attachment. Always stop the engine before cleaning. WARNING! Overexposure to vibration can lead to circulatory damage or nerve damage in people who have impaired circulation. Contact your doctor if you experience symptoms of overexposure to vibration. Such symptoms include numbness, loss of feeling, tingling, pricking, pain, loss of strength, changes in skin colour or condition.

These symptoms normally appear in the fingers, hands or wrists. The risk increases at low temperatures. □ Grass trimming with a trimmer head Trimming • Hold the trimmer head just above the ground at an angle. It is the end of the cord that does the work. Let the cord work at its own pace.

Never press the cord into the area to be cut. The cord wears quicker and must be fed forward more often when working against stones, brick, concrete, metal fences, etc. , than when coming into contact with trees and wooden fences. □ When trimming and clearing you should use less than full throttle so that the cord lasts longer and to reduce the wear on the trimmer head. Cutting • The trimmer is ideal for cutting grass that is difficult to reach using a normal lawn mower.

Keep the cord parallel to the ground when cutting. Avoid pressing the trimmer head against the ground as this can ruin the lawn and damage the tool. □ •• The cord can easily remove grass and weeds up against walls, fences, trees and borders, however it can also damage sensitive bark on trees and bushes, and damage fence posts. Reduce the risk of damaging plants by shortening the cord to 10-12 cm and reducing the engine speed.



[You're reading an excerpt. Click here to read official HUSQVARNA 122C user guide](http://yourpdfguides.com/dref/4739420)
<http://yourpdfguides.com/dref/4739420>

Do not allow the trimmer head to constantly come into contact with the ground during normal cutting. Constant contact of this type can cause damage and wear to the trimmer head. Sweeping • The fan effect of the rotating cord can be used for quick and easy clearing up. Hold the cord parallel to and above the area to be swept and move the tool to and fro. □ When cutting and sweeping you should use full throttle to obtain the best results. 16 – English MAINTENANCE Carburetor Adjustment of the idle speed Before any adjustments are made, make sure that the air filter is clean and the air filter cover is fitted.

Adjust the idle speed using the idle adjustment screw T, if it is necessary to readjust. First turn the idle adjustment screw T clockwise until the cutting attachment starts to rotate. Then turn the screw anticlockwise until the cutting attachment stops. The idle speed is correctly adjusted when the engine will run smoothly in every position. The idle speed should also be well below the speed at which the cutting attachment starts to rotate. The muffler is designed to reduce the noise level and to direct the exhaust gases away from the operator. The exhaust gases are hot and can contain sparks, which may cause fire if directed against dry and combustible material. If the idle speed cannot be adjusted so that the cutting attachment stops, contact your dealer/service workshop.

Do not use the machine until it has been correctly adjusted or repaired. Some mufflers are equipped with a special spark arrester screen.

If your machine has this type of muffler, you should clean the screen at least once a week. This is best done with a wire brush. On mufflers without a catalytic converter the screen should be cleaned weekly, or replaced if necessary. On mufflers fitted with a catalytic converter the screen should be checked, and if necessary cleaned, monthly. If the screen is damaged it should be replaced.

If the screen is frequently blocked, this can be a sign that the performance of the catalytic converter is impaired. Contact your dealer to inspect the muffler. A blocked screen will cause the machine to overheat and result in damage to the cylinder and piston. CAUTION! Some mufflers are fitted with a catalytic converter. See chapter on Technical data to see whether your machine is fitted with a catalytic converter.

CAUTION! Never use a machine with a defective muffler. Mufflers fitted with catalytic converters get very hot during use and remain so for some time after stopping, this also applies at idle speed. Contact can result in burns to the skin. The spark plug should be replaced after about a month in operation or earlier if necessary. To keep the working temperature as low as possible the machine is equipped with a cooling system. 2 CAUTION! Always use the recommended spark plug type! Use of the wrong spark plug can damage the piston/ cylinder. Check that the spark plug is fitted with a suppressor. Two-piece shaft Clean the cooling system with a brush once a week, more often in demanding conditions. A dirty or blocked cooling system results in the machine overheating which causes damage to the piston and cylinder.

The drive shaft end in the lower shaft should be lubricated with grease every 30 hours. There is a risk that the drive shaft ends (splined coupling) on models with two-piece shafts will seize if they are not lubricated regularly. spark plug The spark plug condition is influenced by: •••Incorrect carburetor adjustment. An incorrect fuel mixture (too much or incorrect type of oil). a dirty air filter. These factors cause deposits on the spark plug electrodes, which may result in operating problems and starting difficulties. If the machine is low on power, difficult to start or runs poorly at idle speed: always check the spark plug first before taking any further action. If the spark plug is dirty, clean it and check that the electrode gap is 0.020 inch (0,5 18 – English MAINTENANCE

Air filter Put the filter in a plastic bag and pour the filter oil over it. Knead the plastic bag to distribute the oil.

Squeeze the excess oil out of the filter inside the plastic bag and pour off the excess before fitting the filter to the machine. Never use common engine oil. This would drain through the filter quite quickly and collect in the bottom. The air filter must be regularly cleaned to remove dust and dirt in order to avoid: ••••• Carburetor malfunctions Starting problems Loss of engine power Unnecessary wear to engine parts Excessive fuel consumption. Bevel gear The bevel gear is filled with the right quantity of grease at the factory.

However, before using the machine you should check that the bevel gear is filled three-quarters full with grease. Use HUSQVARNA special grease. Clean the filter every 25 hours, or more regularly if conditions are exceptionally dusty. Cleaning the air filter Remove the air filter cover and take out the filter. Wash it clean in warm, soapy water.

Ensure that the filter is dry before refitting it. An air filter that has been in use for a long time cannot be cleaned completely. The filter must therefore be replaced with a new one at regular intervals. a damaged air filter must always be replaced. If the machine is used in dusty conditions the air filter should be soaked in oil. See instructions under the heading Oiling the air filter. The grease in the bevel gear does not normally need to be changed except if repairs are carried out. Oiling the air filter Always use HUSQVARNA filter oil, art. The filter oil contains a solvent to make it spread evenly through the filter. You should therefore avoid skin contact.

English – 19 MAINTENANCE Maintenance schedule The following is a list of the maintenance that must be performed on the machine. Most of the items are described in the Maintenance section. Maintenance Clean the outside of the machine. Make sure the throttle trigger lock and the throttle function correctly from a safety point of view. Check that the stop switch works correctly. Check that the cutting attachment does not rotate at idle. Check that the guard is undamaged and not cracked. replace the guard if it has been exposed to impact or is cracked. Check that the trimmer head is undamaged and not cracked. Replace the trimmer head if necessary.

Check that nuts and screws are tight. Check that there are no fuel leaks from the engine, tank or fuel lines. check the starter and starter cord. Check that the vibration damping elements are not damaged. Clean the outside of the spark plug.

Check that the spark plug is fitted with a suppressor. clean the machine's cooling system. Clean or replace the spark arrester screen on the muffler (only applies to mufflers without a catalytic converter). Clean the outside of the carburetor and the space around it. Check the fuel filter from contamination and the fuel hose from cracks or other defects.

Check that the spark plug is fitted with a suppressor.



[You're reading an excerpt. Click here to read official HUSQVARNA 122C user guide](http://yourpdfguides.com/dref/4739420)
<http://yourpdfguides.com/dref/4739420>

To ISO 8893, kW/ rpm Catalytic converter muffler Speed-regulated ignition system Ignition system Spark plug Electrode gap, inch/mm Fuel and lubrication system Fuel tank capacity, US pint/litre Weight Weight without fuel, cutting attachment and guard, Lbs/kg Noise emissions (see note 1) Sound power level, measured dB(A) Sound power level, guaranteed LWA dB(A) Sound levels (see note 2) Equivalent sound pressure level at the operator's ear, measured according to EN ISO 11806 and ISO 22868, dB(A): Vibration levels (see note 3) Equivalent vibration levels (ahv,eq) at handles, measured according to EN ISO 11806 and ISO 22867, m/s² Equipped with trimmer head (original), left/right 5,0/3,6 3,6/3,5 88 90 102 104 104 108 9,7/4,4 10,6/4,8 0,6/0,3 0,6/0,3 NGK CMR6A 0,02/0,5 NGK CMR6A 0,02/0,5 1,32/21,7 1,26/32,0 1,06/27 2900 7200 7200 0,6/7800 Yes No 1,32/21,7 1,26/32,0 1,06/27 2900 9100 6232 0,6/7800 Yes No 122LDx-series NOTE! This spark ignition system complies with the Canadian ICES-002 standard. Note 1: Reported data for equivalent sound pressure level for the machine has a typical statistical dispersion (standard deviation) of 1 dB (A). Note 2: Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1 m/s². English – 21 TECHNICAL DATA 122LDx-series Approved accessories Arbor shaft thread M10 Trimmer head 122C Approved accessories Blade shaft thread 3/8 R Trimmer head T25 (Ø 2). The following attachments are recommended for the specified models. Approved accessories Clean sweep attachment with shaft SR600 Hedge trimmer attachment with shaft HA 850 Edger attachment with shaft Saw attachment with shaft PA 1100 Saw attachment without shaft PA Cultivator attachment with shaft CA 150 Trimmer attachment with shaft TA 850 Approved accessories Cultivator attachment CAC Edger attachment EAC Pole saw attachment PAC Blower attachment BAC Art No. 537 19 67-01 537 19 66-06 537 19 69-01 537 18 33-16 537 18 33-11 537 42 54-01 537 35 35-01 Art No. 952 71 19-07 952 71 19-08 952 71 19-10 952 71 19-11 Use with 122LDx-series 122LDx-series 122LDx-series 122LDx-series 122LDx-series 122LDx-series Use with 122LDx-series 122LDx-series 122LDx-series 122LDx-series 22 – English FEDERAL AND CALIFORNIA EMISSIONS CONTROL WARRANTY STATEMENT YOUR WARRANTY RIGHTS AND OBLIGATIONS The EPA (U.

s.

Environmental Protection Agency), CARB (California Air Resources Board), Environment Canada and Husqvarna Forest & Garden are pleased to explain the emissions control system's warranty on your 2009 and later small off-road engine. And Canada, new equipment that use small off-road engines must be designed, built, and equipped to meet the applicable Federal or Californian stringent anti-smog standards. Husqvarna Forest & Garden must warrant the emissions control system on your small off-road engine for the period listed below provided there has been no abuse, neglect or improper maintenance of your equipment. Your emissions control system may include parts such as the carburetor, ignition system, catalytic converter, fuel tank, filters and other associated components. Also, included may be hoses, belts, connectors, sensors, and other emission-related assemblies. Where a warrantable condition exists, Husqvarna Forest & Garden will repair your small off-road engine at no cost to you including diagnosis, parts and labor. **WARRANTY COMMENCEMENT DATE** The warranty period begins on the date the engine or equipment is delivered to an ultimate purchaser. **LENGTH OF COVERAGE** Husqvarna Forest & Garden warrants to the ultimate purchaser and each subsequent owner that the engine or equipment is designed, built, and equipped so as to conform with all applicable regulations adopted by EPA and CARB, and is free from defects in materials and workmanship that causes the failure of a warranted part for a period of two years. **WHAT IS COVERED REPAIR OR REPLACEMENT OF PARTS** Repair or replacement of any warranted part under the warranty must be performed at no charge to the owner at a warranty station. Warranty services or repairs will be provided at all Husqvarna Forest & Garden distribution centers that are franchised to service the subject engines.

Throughout the emissions warranty period of two years, Husqvarna Forest & Garden must maintain a supply of warranted parts sufficient to meet the expected demand for such parts. **WARRANTY PERIOD** Any warranted part that is scheduled for replacement as required in the maintenance schedule, is warranted for the period of time prior to the first scheduled replacement point for that part. If the part fails prior to the first scheduled replacement, the part will be repaired or replaced by Husqvarna Forest & Garden at no cost. Any such part repaired or replaced under warranty is warranted for the remainder of the period prior to the first scheduled replacement point for the part. Any warranted part that is not scheduled for replacement as required in the maintenance schedule, is warranted for two years.

@@@Any such part repaired or replaced under warranty will be warranted for the remaining warranty period. **DIAGNOSIS** The owner must not be charged for diagnostic labor that leads to the determination that a warranted part is in fact defective, provided that such diagnostic work is performed at a warranty station. **CONSEQUENTIAL DAMAGES** Husqvarna Forest & Garden is liable for damages to other engine components proximately caused by a failure under warranty of any warranted part. **MANUFACTURER'S WARRANTY COVERAGE** The emissions control system is warranted for two years. If any emissions-related part on your equipment is defective, the part will be repaired or replaced by Husqvarna Forest & Garden.

OWNER'S WARRANTY RESPONSIBILITIES • As the small off-road engine owner, you are responsible for performance of the required maintenance listed in your operator's manual. Husqvarna Forest & Garden recommends that you retain all receipts covering maintenance on your small off-road engine, but Husqvarna Forest & Garden cannot deny warranty solely for the lack of receipts or your failure to ensure the performance of all scheduled maintenance. As the small off-road engine owner, you should however be aware that Husqvarna Forest & Garden may deny you warranty coverage if your small off-road engine or a part has failed due to abuse, neglect, or improper maintenance or unapproved modifications. You are responsible for presenting your small off-road engine to a Husqvarna Forest & Garden distribution center or service center as soon as the problem exists. The warranty repairs should be completed in a reasonable amount of time, not to exceed 30 days. If you have any questions regarding your warranty coverage, you should contact Husqvarna Forest & Garden at 1-800-487-5951 or visit www.husqvarna.com. Spark Plug, covered up to maintenance schedule Ignition Module Muffler with catalytic converter Fuel tank **WHAT IS NOT COVERED** All failures caused by abuse, neglect or improper maintenance are not covered.



[You're reading an excerpt. Click here to read official HUSQVARNA 122C user guide](http://yourpdfguides.com/dref/4739420)
<http://yourpdfguides.com/dref/4739420>

ADD -ON OR MODIFIED PARTS Add-on or modified parts that are not exempted by CARB or EPA may not be used. The use of any non-exempted add-on or modified parts will be grounds for disallowing a warranty claim. Husqvarna Forest & Garden will not be liable to warrant failures of warranted parts caused by the use of a non-exempted add-on or modified part.

HOW TO FILE A CLAIM If you have any questions regarding your warranty rights and responsibilities, you should contact your nearest authorized servicing dealer or call Husqvarna Forest & Garden at 1-800-487-5951 or visit www. WHERE TO GET WARRANTY SERVICE Warranty services or repairs are provided through all Husqvarna Forest & Garden authorized servicing dealers. MAINTENANCE, REPLACEMENT AND REPAIR OF EMISSION-RELATED PARTS Any replacement part may be used in the performance of any warranty maintenance or repairs and must be provided without charge to the owner. Such use will not reduce the warranty obligations of the manufacturer. MAINTENANCE STATEMENT The owner is responsible for the performance of all required maintenance, as defined in the operator's manual. .



[You're reading an excerpt. Click here to read official HUSQVARNA 122C user guide](http://yourpdfguides.com/dref/4739420)
<http://yourpdfguides.com/dref/4739420>